P.N.: 36586-0

ISSUE: J


REV.BY: TSR

DWG.BY: DCS


ECN-116180 DATE: 03/07/2014

### AD SERIES "KD STYLE ADJUSTABLE STYLE SHELVING UNITS


## AD Series Shelving 26", 32", 38", 44" & 50" Assembly and Installation



AD44, Shown Configured For (1) 8" Door kit And Modular Cabinets (DC6, DC12, 9, 19, 919)



AD44, Shown Configured
For
(2) 10" Door kits
Or
No accessories



AD44LCV
(NISSAN FSV)
Shown Configured
For
(2) 10" Door kits
Or
No accessories

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194



### BEFORE YOU START!

IMPORTANT INSTALLATION STEPS ARE DENOTED USING A STOP SIGN. THESE STEPS MUST BE PERFORMED AS SPECIFIED IN ORDER TO ENSURE A PROPER INSTALLATION AND MUST BE FOLLOWED IN ORDER TO MAINTAIN YOUR PRODUCT WARRANTY!



CRITICAL INFORMATION PERTAINING TO USER AND/OR VEHICLE SAFETY IS DENOTED USING A CAUTION SIGN. SAFETY ITEMS MUST BE STRICTLY ADHERED TO IN ORDER TO ENSURE A SAFE WORKING ENVIRONMENT!



YOU WILL NEED THE FOLLOWING TOOLS IN ORDER TO COMPLETE THIS JOB.

#3 PHILLIPS SCREWDRIVER 1/2" COMBINATION END WRENCH 1/2" SOCKET W/RATCHET

ALL FASTENERS USED IN THE ASSEMBLY AND INSTALLATION OF THIS PRODUCT SHOULD BE TIGHTENED TO THE SPECIFIED TORQUE AS LISTED WITH EACH FASTENER CALLOUT BOX.

#### Note:

These install instructions for the AD Series shelving consists of three sections. The first is for assembling the AD shelving units using an Adrian Steel available assembly fixture/stand. Please refer to STEP 1 thru STEP 7.

The second consists of assembling the shelving units directly on the previously installed rail kits in your full size van. Please refer to STEP 8 thru STEP 9.

The remaining third section is for installing shelf divider kits if your particular shelving units come supplied with them. Please refer to page 13 thru 14.

All instruction steps described below are for assembling the shelving unit configured for (1) 8" door kit and installation of modular cabinets (DC6, DC12, 9, 19, 919) on the bottom shelf. Please see front page of cover sheet, upper illustration.

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194



### ADJUSTMENT OF AD SERIES SHELVING UNIT


- IF AN INSTALLED UNIT EXHIBITS AN AUDIBLE NOISE OR RATTLE AT REAR ATTACHMENT POINTS OF SHELVES.
- FOLLOW STEPS BELOW FOR ADJUSTMENT (ONLY ONE END PANEL NEEDS TO BE ADJUSTED).


#### REFERENCE FIGURE BELOW FOR FOLLOWING STEPS

- 1. LOOSEN BOLT (A)
- 2. LOOSEN BOLT (B)
- 3. LOOSEN SCREW (C) 3 PLACES
- RE-TORQUE BOLT (A) TO 12 ft lbs. WHILE APPLYING OUTWARD FORCE TO TOP OF END PANEL.
- RE-TORQUE BOLT (B) TO 12 ft lbs. WHILE APPLYING OUTWARD FORCE TO BOTTOM OF END PANEL.
- 6. RE-TORQUE SCREW (C) TO 8 ft lbs. (3 places) WHILE APPLYING OUTWARD FORCE TO CENTER OF END PANEL

7. CHECK SHELVING UNIT FOR AUDITABLE NOISE OR RATTLE AT REAR ATTACHMENT POINTS OF SHELVES. IF NEEDED MAKE FURTHER ADJUSTMENTS TO UNIT USING ABOVE PROCESS.





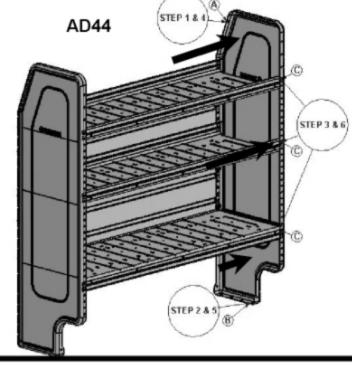

APPLY
OUTWARD
FORCE TO
END PANEL
AT THE
LOCATIONS
AND
DIRECTION
SHOWN BY
ARROWS IN
FIGURE



SHELVES SHOULD NOT BE INSTALLED OVER BLACK REMOVABLE RIVETS, BECAUSE THIS MAY RESULT IN SHELF DAMAGE.



ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194

P.N.36586-0 Revision J Page No. 3 of 14



### Step 01

### End Panel Installation 35289-G & 35290-G (STANDARD FSV) EPS1451LH & EPS1451RH (NISSAN FSV)

Install end panels into the fixture as shown below (Fig 2). Align the holes in the bottom end panel flange and install over the roll pins located at the base of the fixture (Fig 3). Secure the top end panel flange with the toggle clamp as shown below (Fig 4). Repeat for the (2<sup>nd</sup>) end panel.




## Recommended AD Series Assembly Fixture/Stand (ref p/n: 36710-0 see Figure 1)

Pre-assembly of the shelving units outside of the van provides greater accessibility, stability, and lighting.

Figure 01



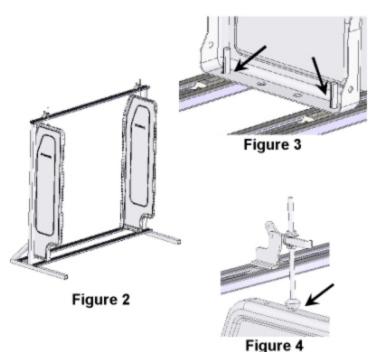

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194

P.N.36586-0 Revision J Page No. 4 of 14




### Step 02 **Back Panel (Upper) Installation**

Place (6) removable, push-rivets (FAS0710) and EPDM washers (FAS0688) into the holes on each end of the back panel (35310-G) as shown below in Fig 5. Do not push in the center post of the push-rivet at this time. Position the upper back panel (35310-G) with the installed push-rivets between the (2) upright end panels, Fig. 6. Align the top push-rivets with the (3rd) hole down as shown in Figure 5. Depress the locking column to secure the back panel to the end panel. Install the remaining (5) push-rivets onto the back panel. Back panel should be orientated with the cylindrical embossments (ribs) as shown in detail views shown below.

NOTE: For all of the shelving unit configurations shown on the cover page, the upper back panel is positioned and installed the same way.



### AD44 SHOWN (AD44LCV USES SAME PROCESS)

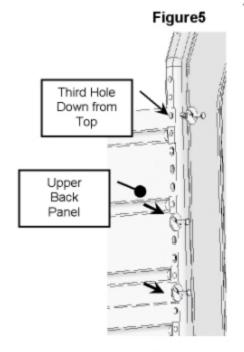








Figure 6

ADRIAN STEEL COMPANY • 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194

P.N.36586-0 Revision J Page No. 5 of 14



## Step 03 Back Panel (Lower) Installation 35310-G & FAS0712

NOTE: When the unit is configured for (2) 10" door kit, or no accessories are installed. The lower back panel is positioned in (Figure 9). So that the shelves will be equal distance apart.

NOTE: When the unit is configured for (1) DK4208 and Modular Cabinets installation. The lower back panel is positioned in (figure 10). The shelves will not be an equal distance apart.

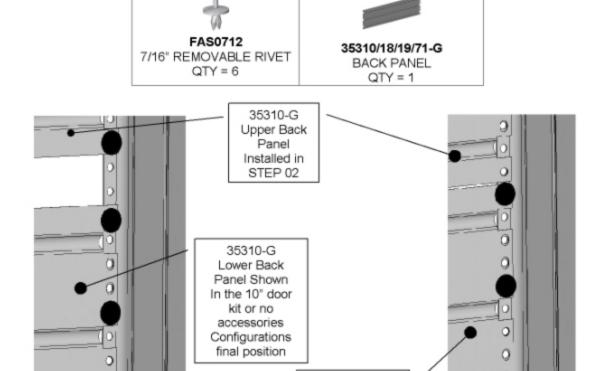


Figure 9 Figure 10

35310-G Lower Back Panel Shown In the 8" door kit configuration final position

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194



### Step 04 Bottom Shelf (1 of 3) Installation

Position the bottom (1 of 3) shelf into the unit. With the shelf stud located in the back shelf flange engaged into the end panel holes as shown in Fig 11, 12, 13 push down on the front edge of the shelf until shelf is horizontal. Align the end panel thru holes with the shelf tinnerman fastener and secure in place with a 1/4-20UNC x 1/2" THP screw (FAS0061). Repeat for opposite side of the shelf weldment.

NOTE: When a modular component is going to be mounted on a shelf the flanges need to be pointed down. Normal shelf flange orientation is pointed up.

NOTE: When installing shelves onto end panels. Make sure that the removable rivets do not come in contact with the shelf. The rivets will need to be moved if this occurs






Figure 11

Shelf Weldment Stud Shown Engaged in 5TH Hole Up from Bottom. (NISSAN IS 8<sup>TH</sup>

Figure 12

Shelf Weldment

Engaged in Fifth Hole Up from Bottom. (NISSAN IS 8<sup>TH</sup> HOLE UP)

Stud Shown



Fifth Hole Up from Bottom. (NISSAN IS 8<sup>TH</sup> HOLE UP)

Figure 13



SHELVES SHOULD NOT BE INSTALLED OVER BLACK REMOVABLE RIVETS, BECAUSE THIS MAY RESULT IN SHELF DAMAGE.





IF SHELVES HAVE BEEN INSTALLED OVER BLACK REMOVABLE RIVETS, BEND SHELF BACK TO ORIGINAL STATE (90 DEGREES)



ADRIAN STEEL COMPANY • 906 JAMES ST. • ADRIAN, MI, 49221 . (517) 265-6194



## Step 05 Center & Upper Shelf Installation

Repeat the procedure describing the lower shelf installation and repeat process for the remaining (2) shelf weldment assemblies. STANDARD AD44 SHOWN



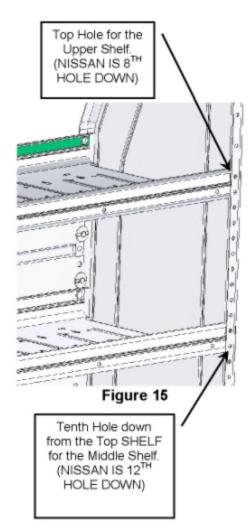


Figure 14



SHELVES SHOULD NOT BE INSTALLED OVER BLACK REMOVABLE RIVETS, BECAUSE THIS MAY RESULT IN SHELF DAMAGE.



STOP

IF SHELVES HAVE BEEN INSTALLED OVER BLACK REMOVABLE RIVETS, BEND SHELF BACK TO ORIGINAL STATE (90 DEGREES)

STOP

ADRIAN STEEL COMPANY • 906 JAMES ST. • ADRIAN, MI. 49221 • (517) 265-6194

P.N.36586-0 Revision J Page No. 8 of 14



## Step 06 Typical Shelving Unit into FSV Installation AD44 SHOWN AD44LCV (NISSAN) IS SIMILAR



FAS0085 WASHER, EXT TOOTH LOCK, 5/16"ID QTY = 4



FAS0086 WASHER, FLAT, 5/16°ID QTY = 4



FAS0165

BOLT, HEX HD, 5/16-18UNC X 5/8"LG

QTY = 4

TOTQUE TO 12ft lbs.

Place completed AD Series shelf unit into the vehicle and position as shown in Fig. 16. Please note that the exact position in the vehicle will depend on the PDS sheet and/or the end users requirements. This is only a general guideline.

Locate the floor rail kit extruded alum "sled" as shown in Fig. 17 and reposition the threaded hole directly under the end panel flange thru hole as shown in Fig. 18. Secure shelf flange to the "sled" with fasteners shown above. Leave fasteners loose at this time for easy repositioning of the shelf during the following steps. Repeat for the opposite end panel



Figure 16



Figure 17



Figure 18

ADRIAN STEEL COMPANY • 906 JAMES ST. • ADRIAN, MI. 49221 • (517) 265-6194



## Step 07 (Continued) Typical Shelving Unit into FSV Installation

Locate the upper side wall rail extruded alum "sled" as shown in Fig. 19 and reposition the threaded hole directly behind the end panel flange thru hole as shown in Fig. 20. Secure shelf flange to the "sled" with fasteners listed at beginning of Step 7 (pp 9). Leave fasteners loose at this time for easy repositioning of the shelf during the following steps. Repeat for the opposite end panel.

#### Note:

Once all the fasteners securing the AD Series shelf unit to the rail kit are in place, reposition the shelving unit to the final desired location and tighten all fasteners, to 12 +/- 1 ft-lbs.



Figure 19



Figure 20



Figure 21

ADRIAN STEEL COMPANY • 906 JAMES ST. • ADRIAN, MI. 49221 • (517) 265-6194



### Step 08

## INSTALLING SHELVING UNITS DIRECTLY ONTO RAIL KITS (RKFSVLWB, RKFSVXLW, RKFSVLHD)

This <u>second section</u> consists of assembling the shelving units directly on the previously installed rail kits in your full size van. It should be noted that the assembly sequence of the shelving units are almost exactly the same as outlined in previous section.



Figure 22



Figure 23

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194

P.N.36586-0 Revision J Page No. 11 of 14



### Step 09

### **End Panel Installation**

STD. AD44 SHOWN, AD44LCV (NISSAN) SIMILAR.



FAS0085 WASHER, EXT TOOTH LOCK, 5/16°ID QTY = 4



**FAS0086**WASHER, FLAT, 5/16"ID
QTY = 4



## FAS0165 BOLT, HEX HD, 5/16-18UNC X 5/8"LG QTY = 4 TOTQUE TO 12ft lbs.

Install end panels into the vehicle and attach to the rail kits as illustrated below in Fig 24. Align the lower end panel flange on the lower rail and secure end panel to the slide as shown in Fig. 25 & 26 using fasteners listed. Attach the top back flange of each end panel in similar manor to the upper rail as illustrated below in Fig. 26 & 27.

Adjust initial position of both end panel to there approximant final position on the rails (curb or street side). Tighten the fasteners only hand tight at this time; you will need to make adjustments during the installation of the back panels and shelves. Once the unit is assembled refer to step 7 above.



Figure 24



Figure 25



Figure 26



Figure 27

### NOTE: REFER BACK TO PAGE 3 TO CHECK UNITS.



DOUBLE-CHECK ALL FASTENER LOCATIONS TO BE SURE THAT ALL FASTENERS ARE TIGHTENED TO SPECIFICATIONS!




## YOUR INSTALLATION IS NOW COMPLETE! STOW THIS COPY IN THE VEHICLE FOR FUTURE REFERENCE!

ADRIAN STEEL COMPANY • 906 JAMES ST. • ADRIAN, MI. 49221 • (517) 265-6194



# DIVIDER KIT AD SERIES 42" SHELVING Ref: 35317-G for 42" SHELVING ONLY! Installation Instructions

ORDER DIVIDERS SEPERATELY FOR AD26, AD32, AD38 OR AD50 SHELVES. ALL OTHER INSTALLATION ARE THE SAME.

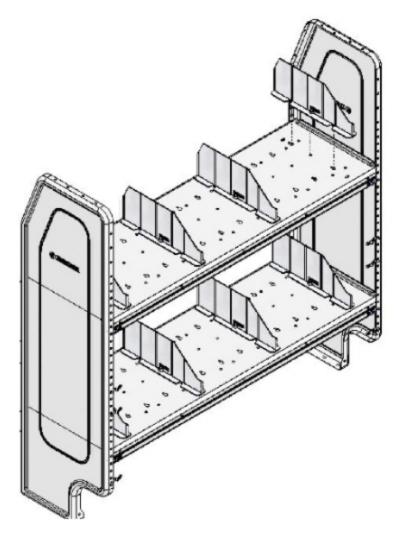

STANDARD AD44 SHOWN, AD44LCV (NISSAN) USES THE SAME PROCESS.

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194

P.N.36586-0 Revision J Page No. 13 of 14




### VEHICLE PREPARATION, BEFORE YOU START

Unpack dividers. Make sure that you have the correct number of dividers for the number of shelves, or the kit ordered DV14C8 or DC14C1 kit of (1). NOTE: This divider will only work with the 42" shelving.



STEP - 01

### **INSERT 35317-G DIVIDER END PINS INTO SLOTTED HOLES**

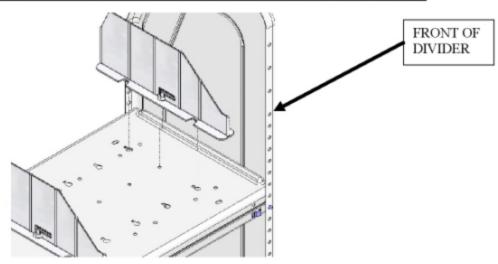

To install dividers onto shelves. Insert the (2) outside pins into the corresponding holes and slide back towards the rear of the shelving unit until the middle pin snaps into the middle hole. To remove the divider pull up on the middle pin's tab and slide toward the front of the shelf.



DOUBLE-CHECK ALL DIVIDER LOCATIONS TO BE SURE THAT ALL TABS ARE IN PLACE TO PREVENT LOSS OF DIVIDER OR PRODUCT SHIFT!



## YOUR INSTALLATION IS NOW COMPLETE! STOW THIS COPY IN THE VEHICLE FOR FUTURE REFERANCE!

ADRIAN STEEL COMPANY \* 906 JAMES ST. \* ADRIAN, MI. 49221 \* (517) 265-6194

P.N.36586-0 Revision J Page No. 14 of 14