


Ecco VigiLED II series is a small compact directional LED head with inbuilt flash controller. Ideal for internal, grille, bumper or rear mounting they feature a clear lens with coloured LED's.

- Synchronous or Alternative Flash
- Dual Voltage – 12/24V
- Low Power Consumption – 350mA @ 12 Volt / 200mA @ 24 Volt
- Supplied with accessories for surface or bracket mount
- Fully sealed electronics – weatherproof to IP67
- Tough die-cast base and Polycarbonate Lens
- SAE J595 Class 1 (amber)
- ECE R65 (Amber and Blue)



Model Part Numbers	Colour
ED0001A	Amber
ED0001B	Blue
ED0001C	Clear (white)
ED0001R	Red
ED0001G	Green

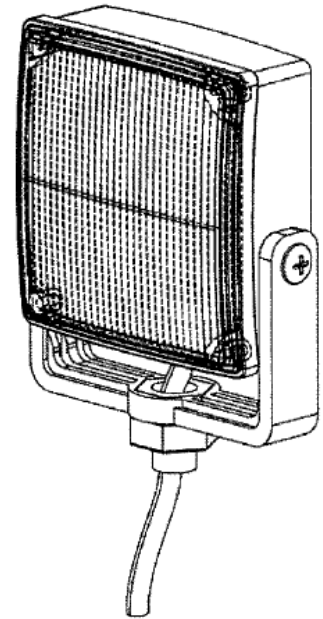

WARNING!

Failure to install or use this product according to manufacturer's recommendations may result in property damage, serious bodily/personal injury, and/or death to you and those you are seeking to protect!



Do not install and/or operate this safety product unless you have read and understand the safety information contained in this manual.

1. Proper installation combined with operator training in the use, care, and maintenance of emergency warning devices are essential to ensure the safety of you and those you are seeking to protect.
2. Exercise caution when working with live electrical connections.
3. This product must be properly grounded. Inadequate grounding and/or shorting of electrical connections can cause high current arcing, which can cause personal injury and/or severe vehicle damage, including fire.
4. Proper placement and installation are vital to the performance of this warning device. Install this product so that output performance of the system is maximised and the controls are placed within convenient reach of the operator so that s/he can operate the system without losing eye contact with the roadway.
5. It is the responsibility of the vehicle operator to ensure during use that all features of this product work correctly. In use, the vehicle operator should ensure the projection of the warning signal is not blocked by vehicle components (i.e., open trunks or compartment doors), people, vehicles or other obstructions.
6. The use of this or any other warning device does not ensure all drivers can or will observe or react to a warning signal. Never take the right-of-way for granted. It is your responsibility to be sure you can proceed safely before entering an intersection, driving against traffic, responding at a high rate of speed, or walking on or around traffic lanes.
7. This equipment is intended for use by authorized personnel only. The user is responsible for understanding and obeying all laws regarding warning signal devices. Therefore, the user should check all applicable city, state, and federal laws and regulations. The manufacturer assumes no liability for any loss resulting from the use of this warning device.



WARNING!

Failure to install or use this product according to manufacturer's recommendations may result in property damage, serious bodily/personal injury, and/or death to you and those you are seeking to protect!

ED0001x VigILED II SERIES

EMC DIRECTIVE

This product complies with UN ECE R10 for electro-magnetic compatibility (emc)

To maintain compliance with this directive it is necessary that good installation practice is followed and a qualified electrician should be consulted.

The VigILED should be fitted using either the swivel bracket or surface mounted and orientated as shown with the cable at the bottom.

1. For bracket mount, drill a 12.5mm (0.49") clearance hole in the required position. Remove the M12 nut and the M12 shakeproof washer from the bolt. Thread the cable through the centre hole in the bolt, fix the VigILED to the bracket using the M5 rubber washers (ensure that this washer is fitted between the VigILED and the bracket as shown in Fig.1.), and the M5 round cap screws. Fit the assembly through the drilled hole, thread the M12 shakeproof washer and the M12 nut onto the cable and fix to the bolt. The cable should be fitted with a suitable gland or grommet to ensure a weather proof seal. Ensure that the wire ends of the cable and the end of the cable sheath where connected to the vehicle battery supply are kept dry by protecting the termination against water ingress or by sealing in some other way.
2. For surface mount, drill two 5.3mm (0.21") clearance holes in the panel 42mm (1.65") apart, for the VigILED to the panel using the M5 rubber washers and the M5 round cap screws in Fig.2. A hole for the cable entry will be required and a suitable gland or grommet should be used. Ensure that the wire ends of the cable and the end of the cable sheath where connected to the vehicle battery supply are kept dry by protecting the termination against water ingress or by sealing in some other way.
3. Connect the cable to an appropriate power source (10-30 Volts DC); the total length of the connecting cable from the power source to the light should be less than the 10m (32ft).

Connect the **RED** to +VDC (fuse@2A)

Connect the **BLACK** to the chassis ground

If two or more beacons are required to flash simultaneously then connect as follows:-

Connect the **YELLOW** wires of all the units together for synchronization

When the **YELLOW** wires of all the heads are connected together, the group 1 heads will flash in phase (P1) or 180 degrees out of phase (P2) with group 2 heads based in the pattern selected. For example, if the light heads in group 1 have flash pattern 2 selected and group 2 light heads have pattern 3 selected, the group 1/group 2 heads will flash in a five flash alternating mode.

Fig.1.


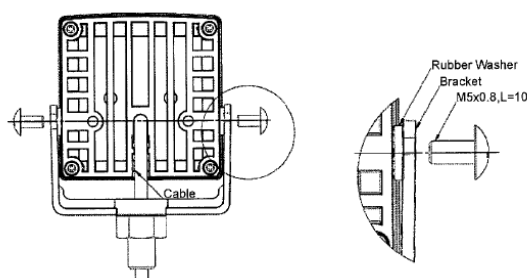


Fig.2.

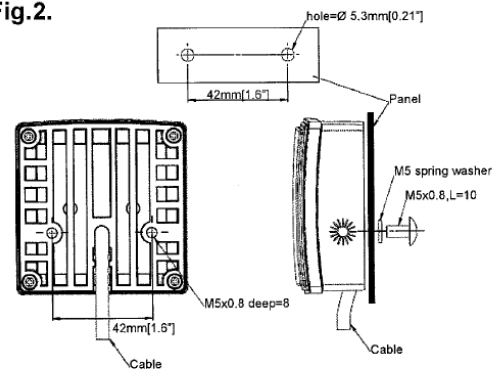

FLASH PATTERNS

Number	Description
1	FIVE FLASH ALT
2	FIVE FLASH SIM P1
3	FIVE FLASH SIM P2
4	QUAD FLASH ALT
5	QUAD FLASH SIM P1
6	QUAD FLASH SIM P2
7	SINGLE FLASH 75 ALT
8	SINGLE FLASH 75 SIM P1
9	SINGLE FLASH 75 SIM P2
10	SINGLE FLASH 375 ALT
11	SINGLE FLASH 375 SIM P1
12	SINGLE FLASH 375 SIM P2
13	QUAD-SQUAD FLASH ALT
14	QUAD-SQUAD FLASH SIM
15	MODULATION FLASH ALT
16	MODULATION FLASH SIM
17	QUAD-SQUAD SCAN
18	STEADY BURN WITH SINGLE AND SINGLE POP
19	STEADY BURN - 5 SINGLE
20	STEADY BURN
21	CYCLE FLASH
22	SINGLE FLASH 120 SIM P1 (R65) DEFAULT
23	SINGLE FLASH 120 SIM P2 (R65)
24	TURN OFF

To select flash pattern, apply the BLUE wire +VDC

- Less than 1 second for next pattern
- More than 1 second for previous pattern
- More than 5 seconds for turn off, when power is reapplied it will resume the previous pattern

Manufacturer Limited Warranty and Limitation of Liability:

Manufacturer warrants that on the date of purchase this product will conform to Manufacturer's specifications for this product (which are available from the Manufacturer upon request), and Manufacturer further warrants that this product is free from defects in materials and workmanship. This Limited Warranty extends for twenty four months from the date of purchase. Other warranties may apply, call Manufacturer for details. Manufacturer will, at its discretion, repair or replace any product found by the Manufacturer to be defective and subject to this Limited Warranty.

DAMAGE TO PARTS OR PRODUCTS RESULTING FROM TAMPERING, ACCIDENT, ABUSE, MISUSE, NEGLIGENCE, UNAPPROVED MODIFICATIONS, FIRE OR OTHER HAZARD; IMPROPER INSTALLATION OR OPERATION; OR NOT BEING MAINTAINED IN ACCORDANCE WITH THE MAINTENANCE PROCEDURES SET FORTH IN MANUFACTURER'S INSTALLATION AND OPERATING INSTRUCTIONS VOIDS THIS LIMITED WARRANTY.

ORAL STATEMENTS OR REPRESENTATIONS ABOUT THE PRODUCT WHICH MAY HAVE BEEN MADE BY SALESPeOPLE, DEALERS, AGENTS OR OTHER MANUFACTURER'S REPRESENTATIVES DO NOT CONSTITUTE WARRANTIES. THIS LIMITED WARRANTY MAY NOT BE AMENDED, MODIFIED, OR ENLARGED EXCEPT BY A WRITTEN AGREEMENT SIGNED BY AN AUTHORIZED OFFICIAL OF MANUFACTURER WHICH EXPRESSLY REFERS TO THIS LIMITED WARRANTY.

Exclusion of Other Warranties: MANUFACTURER MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED. THE IMPLIED WARRANTIES FOR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY EXCLUDED AND SHALL NOT APPLY TO THE PRODUCT. BUYER'S SOLE AND EXCLUSIVE REMEDY IN CONTRACT, TORT, OR UNDER ANY OTHER THEORY AGAINST MANUFACTURER REGARDING THE PRODUCT AND ITS USE SHALL BE THE REPLACEMENT OR REPAIR OF THE PRODUCT AS DESCRIBED ABOVE.

Limitation of Liability: IN THE EVENT OF LIABILITY FOR DAMAGES ARISING OUT OF THIS LIMITED WARRANTY OR ANY OTHER CLAIM RELATED TO THE MANUFACTURER'S PRODUCTS, MANUFACTURER'S LIABILITY FOR DAMAGES SHALL BE LIMITED TO THE AMOUNT PAID FOR THE PRODUCT AT THE TIME OF THE ORIGINAL PURCHASE. IN NO EVENT SHALL MANUFACTURER BE LIABLE FOR LOST PROFITS, THE COST OF SUBSTITUTE EQUIPMENT OR LABOR, PROPERTY DAMAGE, OR OTHER SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES BASED UPON ANY CLAIM FOR BREACH OF CONTRACT, IMPROPER INSTALLATION, NEGLIGENCE, OR OTHER CLAIM, EVEN IF MANUFACTURER OR A MANUFACTURER'S REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. MANUFACTURER SHALL HAVE NO FURTHER OBLIGATION OR LIABILITY WITH RESPECT TO THE PRODUCT OR ITS SALE, OPERATION AND USE, AND MANUFACTURER NEITHER ASSUMES NOR AUTHORIZES THE ASSUMPTION OF ANY OTHER OBLIGATION OR LIABILITY IN CONNECTION WITH SUCH PRODUCT.

This Limited Warranty defines specific legal rights. You may have other legal rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages.



www.eccogroup.com

Group Headquarters &
North American Division



833 West Diamond Street
Boise, Idaho 83705

T:800-635-5900 or 208-395-8000
F:800-688-3226 or 208-395-8190
www.eccolink.com

European Division



Victoria Industrial Park
Victoria Road, Leeds
England LS14 2LA

T:+44 (0)113 237 5340
F:+44 (0)113 237 5360
www.visionalert.co.uk

Asia Pacific Division



25 York Street
Launceston, Tasmania
7250, Australia

T:+61 (0)3 63322400
F:+61 (0)3 63322490
www.hazard.com.au

© 2011 ECCO

920-0210-00 REV D (27-02-2013)